
PAVING

TRIPLE ROLLER TUBE PAVERS

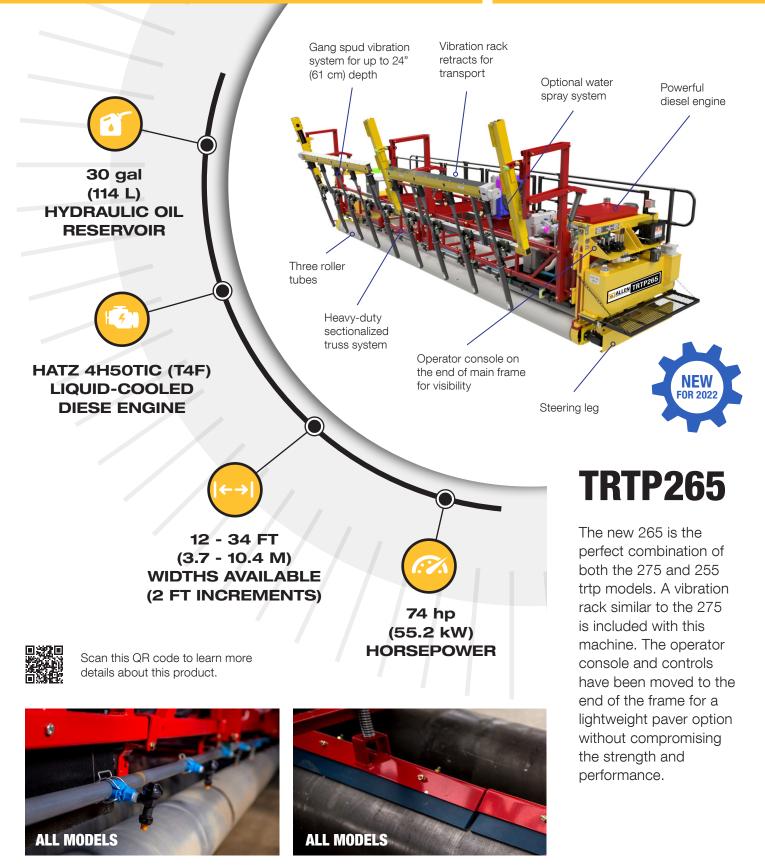

TUBE SCRAPERS Drive tube scrapers prevent build-up on tubes allowing for easier clean-up at the end of the day. Available on all models.

SPRAY SYSTEM Allows fogging of screeding tube to keep concrete from sticking to the tube. Fog bar is made with QD couplings for ease of assembly for machine reconfiguration. Available on all models.

SPECIFICATIONS

DESCRIPTION	TRTP265
ENGINE	Hatz 4H50TIC (T4F)
HORSEPOWER CLASS	74 hp (55.2 kW)
FUEL TYPE	Liquid-Cooled Diesel
WIDTHS AVAILABLE (2 FT INCREMENTS)	12 - 34 ft (3.7 - 10.4 m)
WEIGHT AT 22 FT	8,700 lb (3,946 kg)
ROLLER TUBE DIAMETER	10 in (25.4 cm)
TUBE WEIGHT PER FT	27 lb (12 kg)
HYDRAULIC OIL RESERVOIR	30 gal (114 L)
HYDRAULIC SPRAY SYSTEM	Standard
HYDRAULIC STEERING LEG	Standard
VIBRATOR DEPTH	24" Below Grade
VIBRATOR FREQUENCY	11,000 vpm

PAVING

*Please note: The TRTP will need to be at least 2' wider than the paving width. Example: 16' Paving with = 18' TRTP Length.

STEEL EDGE FORMS AND ACCESSORIES

Allen offers a complete line of steel edge forms, including straight forms, radius, dual-sided and heavy-duty paving forms (dowel holes upon request).

