




**7 gal (26.4 L)
FUEL
CAPACITY**



**IGX800 EFI Honda
GASOLINE
WITH ELECTRIC
STARTER**




**24.9 hp (18.5 kW)
HORSEPOWER
WITH TOP SPEED OF
WORK: 4 mph (6 kph)
TRAVEL: 6 mph (10 kph)**




**102.5 x 34.6 x 57.4 in
(260 x 87.8 x 145 cm)
DIMENSIONS
(L X W X H)**

Largest track buggy payload available at 2,500 lbs

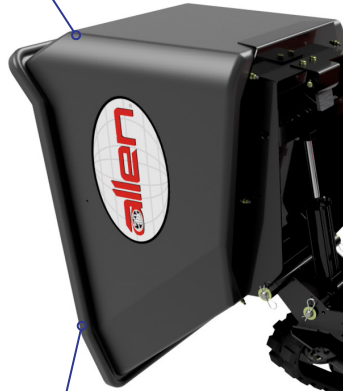

16 Cubic foot heavy-duty poly dump bucket for long life

Zero-turn style controls

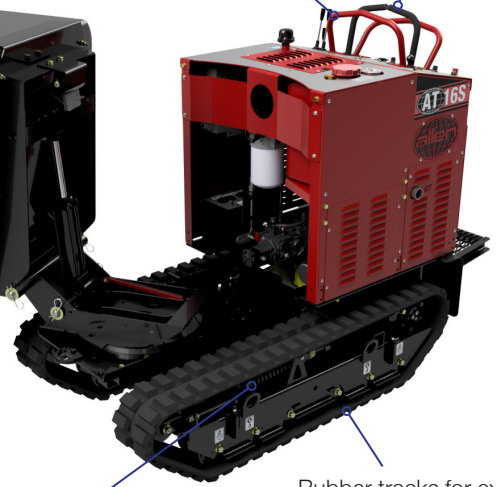

Operator hand grips

Improved track tensioning for ease of maintenance

Rubber tracks for extra load capacity and traction



Scan this QR code to learn more details about this product.

AT16S

The AT16S is the first 16 cu. ft. capacity, low maintenance, fully hydraulic swivel track buggy offered by Allen Engineering. This buggy comes fully equipped with lights, two-inch tubular frame, and robust 2,500 lb payload capacity. With a 180-degree pivoting dump, this buggy can place your material exactly where you need it. Boasting dual lever controls, the steering of this buggy becomes more effortless and ergonomic for the operator.



SPECIFICATIONS

SPECIFICATIONS	AT16S
ENGINE	IGX800 EFI Honda
HORSEPOWER CLASS	24.9 hp (18.5 kW)
STARTER	Electric
FUEL TYPE	Gasoline
FUEL CAPACITY	7 gal (26.4 L)
TOP SPEED	WORK: 4 mph (6 kph) TRAVEL: 6 mph (10 kph)
PAYLOAD	2,500 lb (1,134 kg)
BUCKET CAPACITY	16 cu. ft. (0.45 m ³)
DUMP ANGLE	90°
DUMP/RETURN SPEED EMPTY	15 Seconds
PIVOT ANGLE	180°
WEIGHT	1,930 lb (875 kg)
DIMENSIONS (L X W X H)	102.5 x 34.6 X 57.4 in (260 x 87.8 x 145 cm)

PART NO.	MODEL NO.	DESCRIPTION
077000	AT16PBESD	16 cu. ft., Poly Bucket, Swivel Dump, Gas, Electric Start

